

WEATHERING EXTREME CONDITIONS

- ◆ HEAVY DUTY
- ◆ PRECISION COOLING
- ◆ INDUSTRIAL COOLING



LORDAN


BEYOND THERMAL
ENGINEERING

OUR CORE VALUES

- **COOPERATE WITH OUR CUSTOMERS IN AREAS OF TECHNICAL AND BUSINESS INNOVATION** BY INTRODUCING CUSTOM-MADE SOLUTIONS TO COMPLEX HEATING, COOLING AND REFRIGERATION CHALLENGES.
- **ADD VALUE FOR OUR CUSTOMERS** THROUGH VENDOR MANAGED INVENTORY (VMI) SYSTEMS AND LOCAL PRESENCE THAT REACH THEIR MARKET DEMANDS.
- **INTRODUCE FLEXIBLE COIL DESIGNS AND COATINGS TO WITHSTAND ANY ENVIRONMENTAL EXTREME** FROM CORROSIVE ENVIRONMENTS AND EXTREME TEMPERATURES TO HEAVY VIBRATION AND DELICATE APPLICATIONS.
- **CULTIVATE A WORK ENVIRONMENT THAT SUPPORTS AND VALUES OUR EMPLOYEES' SKILLS AND TALENTS** WITHIN OUR DYNAMIC AND GROWING COMPANY.
- **COMMITMENT TO QUALITY IN THE MATERIAL WE USE AND INTERNATIONAL STANDARDS WE ABIDE BY** PROMISING HIGHLY DURABLE AND EFFICIENT PRODUCTS USING LIGHTWEIGHT MATERIALS.
- **RESPONSIBILITY TO THE ENVIRONMENT** THROUGH THE INTRODUCTION OF ECO-FRIENDLY RESOURCES INTO OUR DESIGNS AND INTEGRATION OF ENERGY SAVING TECHNIQUES TO LOWER OPERATING COSTS.



COMPANY PROFILE

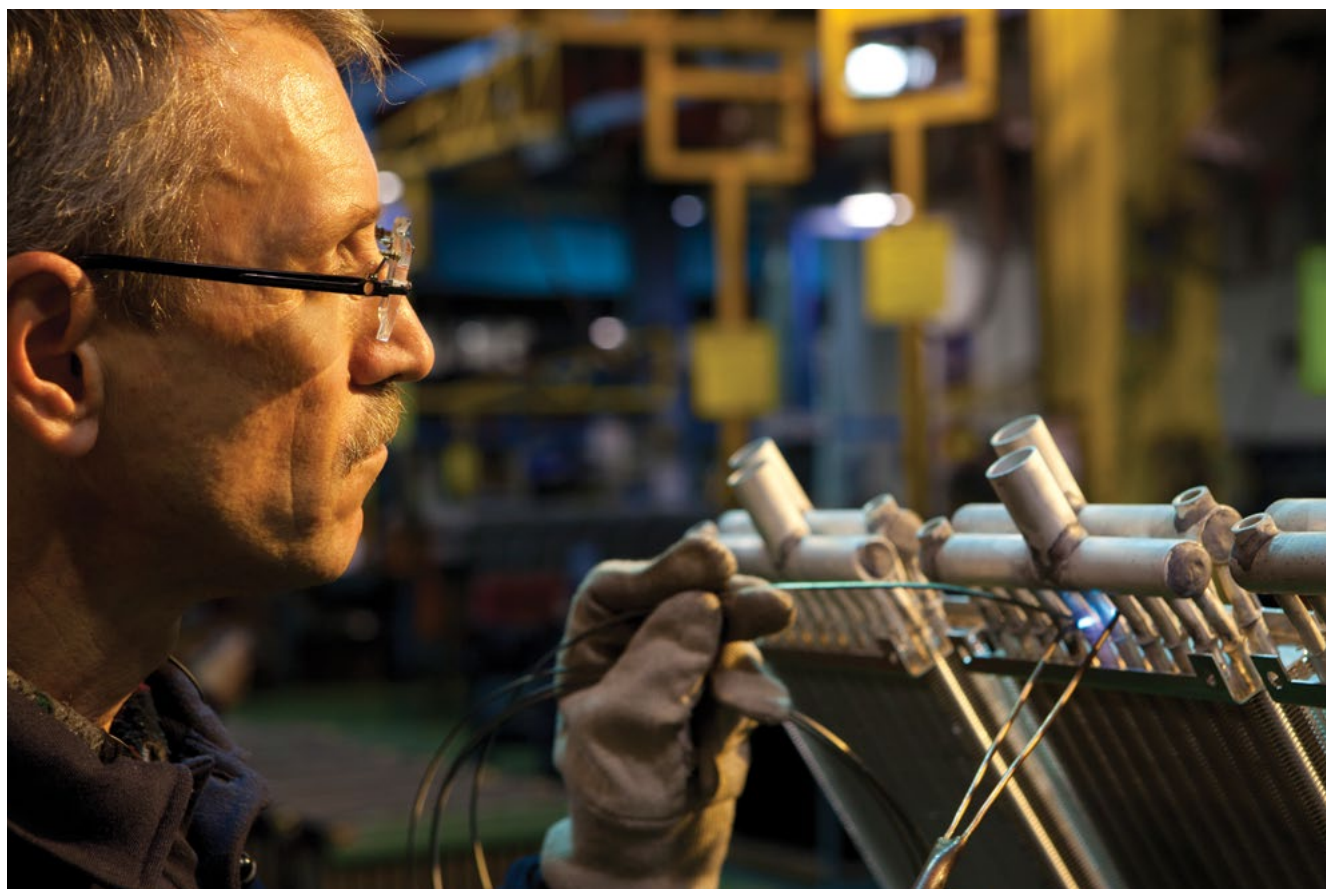

Since 1958 Lordan (A.C.S.) has been engineering and manufacturing high quality custom-made fin and tube heat exchangers for the HVAC&R markets with applications for commercial, industrial, telecommunications, and transportation industries.

Going beyond thermal engineering. Lordan is known internationally for its design flexibility and as a solver of complex heating, cooling and refrigeration challenges, whatever the scope. A global company, Lordan has a sophisticated logistics management system, as well as local representation in over four continents and a substantial customer base spread out all over the world.

Lordan's highly experienced engineering team thrives on innovative thinking and creative approaches in the design of heat transfer technologies, adapting technological applications to withstand severe environmental conditions.

Incorporated into every Lordan design are lightweight materials and eco-friendly resources best suited to your requirements, promising you significant energy savings, lower operating costs and a highly durable quality assured product.

Our coil designs and high quality coatings are built to **weather through any condition**, from corrosive environments and extreme temperatures to heavy vibration and delicate applications. Our core business areas include:

Heavy Duty Applications involving coils with high durability to undergo tough mechanical and environmental conditions required for transportation, energy industries, and the like.


Precision Cooling Applications relating to the production of efficient cooling within strict space and weight limitations to meet the demands of the high-tech and medical industries, sensitive machineries and close control products.

Industrial Cooling Applications to meet the needs of commercial, industrial and residential construction projects that include air-conditioning systems and air handling units (AHU).

Lordan's fully compliant production facilities have manufacturing capabilities that can deliver from single to large series production in its 12,000 square meter plant with a production capacity of over 2,000 different designs a year. We abide by the strictest international quality and environmental management standards and have been UL207 certified since 1999. Our production bases are located in Israel's Galilee region and in Wales (UK), with warehouses throughout the markets and regions we serve, namely Europe, the US, Australia and Asia.

INDEX

Heat Exchange Application - Heavy Duty	5
Heat Exchange Application - Precision Cooling	6
Heat Exchange Application - Industrial Cooling	7
Coil Patterns - Index	8-9
Standards & Testing	10
Innovative Patterns - Lord FiVe & Triple 7	11
Lord FiVe - Technical Information	12
Triple 7 - Technical Information	13
Pattern 8	14
Pattern 9	15
Pattern 11	16
Pattern 13	17
Pattern 14	18
Pattern 7	19
Pattern 5	20
Pattern 6	21
Tubes and Applications	22
Tube Bending Capabilities	23
FINS: Shapes & Applications	24
FINS: Material Options	25
FINS: Special Coatings	26-28
Premium Coils	29
Quotation Request	30
Unit Conversion	31



HEAT EXCHANGE APPLICATION

HEAVY DUTY

Heat Exchange
Applications

Since 1958 Lordan has been specializing in developing heat exchange applications for transportation, military and energy industries that must withstand harsh mechanical and environmental conditions.

From the low temperatures in Antarctica to the sun baked and sand blasted Sahara desert, from tropical South America to the Coal Mines in Australia, our heat exchange designs and custom made coils for climate control systems are built to deliver maximum performance, value and reliability in the most extreme conditions.

These conditions can be highly contaminated and corrosive environments, demanding marine conditions, strong mechanical vibrations, arid, humid or freezing climates etc.

Lordan assigns highly experienced engineers to your project, who will work with your team to identify specific needs. The Lordan team is guaranteed to come up with creative approaches utilizing eco-friendly, lightweight or especially strong materials, specialized coatings and features such as slanted coils to fit specific areas, and a variety of fin surfaces (patterns and shapes).

The following shows some of the applications where our dedicated design and specialized manufacturing capabilities have successfully met unique coil requirements:



◆ TRANSPORTATION MARKET

- Trains
- Buses and Coaches
- Trucks
- Ambulances
- Freight Trucks
- Refrigerated Containers
- Heavy-Duty Vehicles
- Military Vehicles
- Off-Road Vehicles



◆ MARINE EQUIPMENT

- Ships
- Submarines
- Off-Shore Oil and Gas Rigs
- General Marine Environment



◆ MILITARY MARKET

- Land Combat
- Transportation Vehicles
- Field Hospitals
- Mobile Technical Shelters




◆ ENERGY INDUSTRY

- Oil and Gas Rigs
- Mining Equipment

HEAVY DUTY





HEAT EXCHANGE APPLICATION PRECISION COOLING

Lordan specializes in designing precision cooling coils for systems meant to strictly regulate ambient conditions within a very narrow working range. Our coils can produce highly accurate cooling for high density server environments that accommodate sensitive electronics.

Over the years, we have worked on hundreds of projects around the world requiring precision cooling applications for electronic components and for high sensible, tight tolerance control environments in the medical industry and data centers.

Our exclusive Triple Seven (Triple 7) advanced coil pattern is suited for medical applications such as MRI machines, laser technologies and other sensitive heat generating equipment. Triple 7 is among the smallest diameter tube coil available on the market today, delivering superior output and reduced refrigerants charge.

In our dynamic work environment, our experienced engineers work with your development teams to meet the design requirements of your new technology. We thrive on developing cooling solutions to meet the continuously changing cooling requirements of the high-tech industry.

Our precision cooling coils are designed to provide the precise temperature and humidity set point required for the following high sensible applications:



◆ EQUIPMENT

- Electronic and Computer Components
- Laser
- MRI
- CAT Scans
- Medical Equipment
- Military Sensitive Technology



◆ FACILITIES

- Data Centers
- Telecommunication Switching Stations
- ISP Facilities (Internet Service Providers)
- Computer Rooms
- Clean Rooms
- Laboratories
- Medical Operating Theatres

PRECISION COOLING





HEAT EXCHANGE APPLICATION INDUSTRIAL COOLING

Lordan offers custom-made solutions to meet the many different heat-exchange applications requirements – from indoor climate control solutions of large scale construction projects such as commercial and public facilities, residential complexes and office buildings, to industrial cooling processes and equipment cooling applications.

Having worked on massive skyscraper construction projects in Europe and the US, as well as airports and shopping malls, hotels and hospitals, we understand that every large scale construction project is different and has its own unique requirements. This is why we dedicate a large team of experienced engineers to plan, design and support clients throughout the life of the project, during the installation phase, and beyond.

We offer a large selection of coil patterns to meet the diverse heat exchange requirements of large scale projects, and have significantly cut lead times with our Vendor Management Inventory (VMI) system that allows you to pull inventory from our distribution centers closest to you.

Our specialty is in the design and manufacturing of advanced heat exchangers for chillers with our exclusive Triple Seven (Triple7) technology that delivers superior output and reduced refrigerant charge. We also manufacture custom made giant coils best suited to air-conditioning exceptionally large public areas.

Lordan's design and manufacturing capabilities can meet project applications for:



◆ INDOOR CLIMATE CONTROL

- Residential Complexes and Office Buildings
- Commercial and Public Facilities
- Chilled Beams
- HVAC Chillers
- Large Water Coils
- Air Curtains
- Air Handling Units (AHU)



◆ INDUSTRIAL EQUIPMENT & PROCESSES


- Heat Pumps
- Cooling Towers
- Refrigeration Units
- Oil Coolers
- Exhaust Gas Cooling

INDUSTRIAL COOLING




COIL PATTERNS INDEX

LORDAN COIL PATTERNS

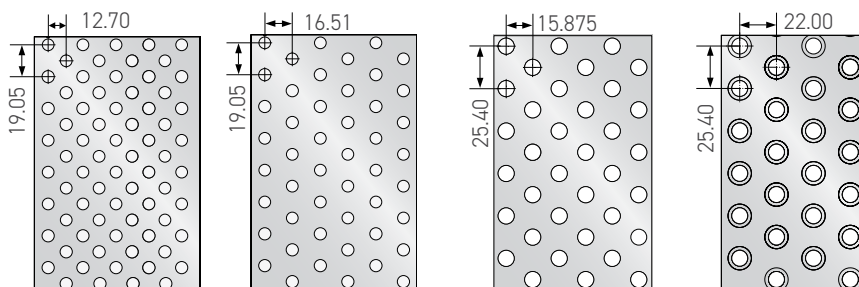

Pattern No.	55 Lord FiVe		15 Triple 7		8		9	
Tube diameter mm	5mm		7mm		9.5mm 3/8"		9.5mm 3/8"	
Tube material	Cu		Cu/Al/St.St.		Cu/Al		Cu/Al/St.St.	
Tube matrix mm [inch]	19.05 X 12.70 (3/4" X 1/2")		19.05 X 16.51 (3/4" X 0.65")		25.4 X 15.88 (1" X 5/8")		25.4 X 22 (1" X 0.866")	
Tube pitch	Staggered		Staggered		Staggered		Staggered	
Tube geometry			Equilateral				Equilateral	
Fin shape			Louvered				Louvered	
	Corrugated		Corrugated		Corrugated		Corrugated	
	Sine wave		Sine wave				Sine wave	
	Flat		Flat				Flat	
Fin edge	Rippled / straight		Ripple / Straight		Ripple / Straight		Ripple / Straight	
Fin density / spacing	FPI	(mm)	FPI	(mm)	FPI	(mm)	FPI	(mm)
Aluminum 0.12 mm (.0045")	10-21	(2.5-1.2)	10-22	(2.5-1.2)	9-17	(2.8-1.5)	9-18	(2.8-1.4)
Aluminum 0.15 mm (.0060") Natural, Hydrophobic, Hydrophilic, marine Al	8-21	(3.2-1.2)	7-22	(3.6-1.2)	7-17	(3.6-1.5)	6-18	(4.2-1.4)
Aluminum 0.20 mm (.0080") Natural, Hydrophobic, Hydrophilic, marine Al	7-16	(3.6-1.6)	6-16	(4.2-1.6)	7-17	(3.6-1.5)	4-18	(6.3-1.4)
Aluminum 0.30 mm (.0120") Natural, Hydrophobic, Hydrophilic	7-16	(3.6-1.6)	6-16	(4.2-1.6)			4-18	(6.3-1.4)
Copper 0.13 mm (.0052")	10-21	(2.5-1.2)	10-16	(2.5-1.6)	10-16	(2.5-1.6)	10-16	(2.5-1.6)
Copper 0.15 mm (.0060")	8-21	(3.2-1.2)	8-16	(3.2-1.6)	8-16	(3.2-1.6)	8-16	(3.2-1.6)
Copper 0.20 mm (.0080")	8-16	(3.2-1.6)	6-16	(4.2-1.6)			7-16	(3.6-1.6)

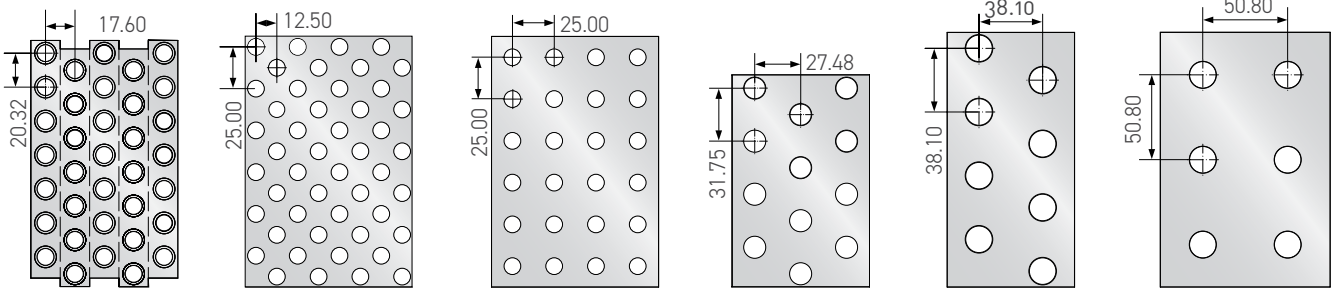

11		13		14		7		5		6	
9.5mm 3/8"		9.5mm 3/8"		9.5mm 3/8"		12.7mm 1/2"		15.9mm 5/8"		15.9mm 5/8"	
Cu/St.St.		Cu		Cu/Al/St.St.		Cu/St.St.		Cu		Cu	
20.32 X 17.6 (0.8" X 0.693")		25 X 12.5 (~1" X ~1/2")		25 X 25 (~1" X ~1")		31.75 X 27.48 (1 1/4" X 1.082")		38.1 X 38.1 (1 1/2" X 1 1/2")		50.8 X 50.8 (2" X 2")	
Staggered		Staggered		In line		Staggered		Staggered		In line	
Equilateral						Equilateral					
Louvered											
Corrugated						Corrugated		Corrugated			
				Sine wave							
Flat		Flat		Flat						Flat	
Ripple / Straight		Straight		Ripple / Straight		Ripple		Ripple / Straight		Straight	
FPI	(mm)	FPI	(mm)	FPI	(mm)	FPI	(mm)	FPI	(mm)	FPI	(mm)
10-16	(2.5-1.6)	10-15	(2.5-1.7)	9-16	(2.8-1.6)	9-14	(2.8-1.8)	9-12	(2.8-2.1)		
8-16	(3.2-1.6)	8-15	(3.2-1.7)	7-16	(3.6-1.6)	6-14	(4.2-1.8)	6-12	(4.2-2.1)	7-8	(3.6-3.2)
		7-15	(3.6-1.7)	4-16	(6.3-1.6)	5-14	(5.1-1.8)	5-12	(5.1-2.1)	4-8	(6.3-3.2)
				4-16	(6.3-1.6)					4-8	(6.3-3.2)
9-16	(2.8-1.6)	9-14	(2.8-1.8)	6-16	(4.2-1.6)	6-14	(4.2-1.8)	8-12	(3.2-2.1)		
9-16	(2.8-1.6)	9-14	(2.8-1.8)	6-16	(4.2-1.6)	6-14	(4.2-1.8)	8-12	(3.2-2.1)		
				5-16	(5.1-1.6)	5-14	(5.1-1.8)	5-12	(5.1-2.1)	7-8	(3.6-3.2)

STANDARDS & TESTING


QUALITY STANDARDS

Lordan is committed to manufacturing superior custom-made specialized products that comply with international standards.

Dedicated to maintaining high quality operations, Lordan complies with international quality management standard ISO 9001-2008.

Our concern for the environment has led us to obtain ISO-14001 environmental management standard and fully support its directives.

Since 1999, Lordan has been UL certified for all standard refrigerants to the UL207 heat exchanger pressure standard. This includes quarterly visits from the UL representatives to assure consistent adherence to this standard.

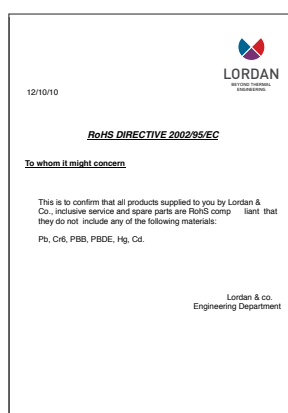

TESTING FACILITIES

To support our promise guaranteeing the long life and high reliability of all our products, each Lordan coil undergoes either helium test or bubble leak test.

The helium leak test is conducted according to international standard (B6), with the test device calibrated to test minute amounts of leakage at an internal pressure of 42 bars, an equivalent of 0.5 gram refrigerant leakage rate per year.

The helium testing process is:

- Based on a temperature stable dry technique
- Capable of finding small leaks that can go undetected by other testing processes
- Have a high level of accuracy



ADVANCEMENT BEYOND THERMAL ENGINEERING

TESTING THE LIMITS OF THERMAL ENGINEERING

Lordan has distinguished itself as a leading developer of advanced fin and tube technology with the introduction of Triple 7 and now with its latest innovation, the Lord FiVe.

More than a decade ago, Lordan unveiled its advanced Triple 7 coil pattern providing a high capacity coil in a small area also available in stainless steel. With Lord FiVe Lordan has outdone itself again, introducing to the market a compact, lightweight coil pattern with a 5 mm diameter tube - the smallest coil on the market today.

As part of our vision to retain a leading edge in the development of technical and business innovation, we invest long and extensive engineering hours in research and development that guarantees you:


- Long term savings in energy costs, with solutions that save you space and volume, environmentally friendly, less reliant on dwindling resources and low in maintenance.
- High quality coils that are built to last for many years to come.

Lord FiVe™

New compact and lightweight, the Lord FiVe, is a 5 mm diameter tube design, whose small diameter provides excellent heat exchange while utilizing smaller amounts of refrigerant making it more environment friendly and cost-effective.

TRIPLE 7

Best performing high capacity coil pattern generating increased airflow, the Triple 7 combines 7mm tubes in an equilateral tube arrangement creating an optimal ratio between tube diameter and distance. This highly versatile coil can be adapted to hand-sized heat transfer applications and giant chillers alike.

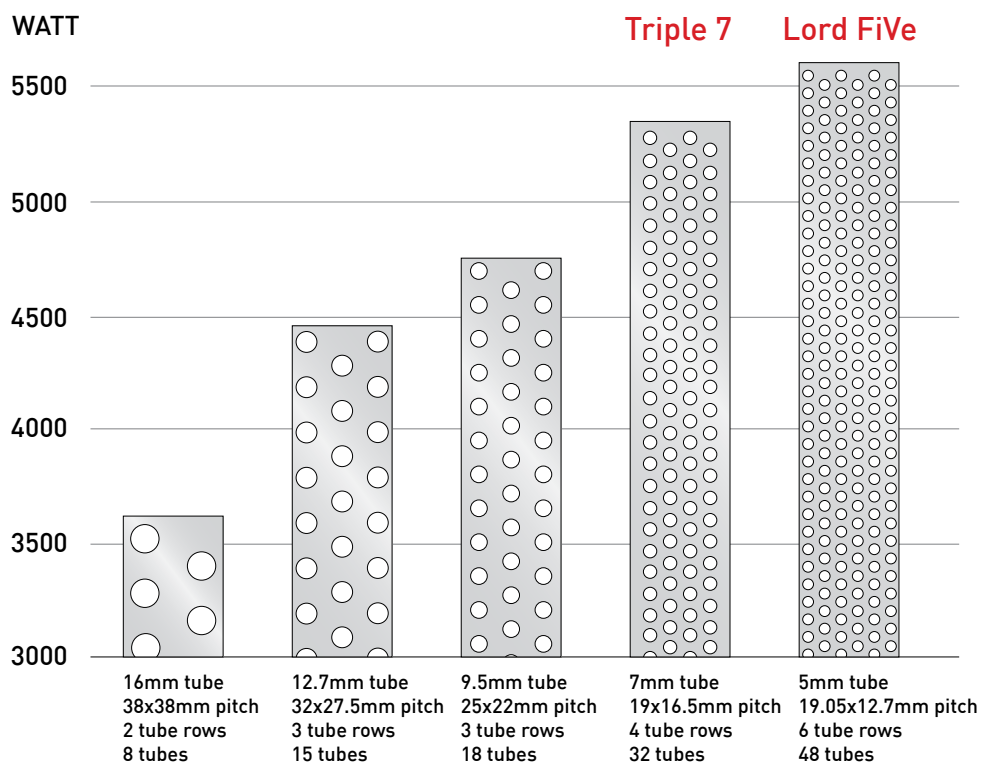



* Capacities are for 30cm x 30cm x 8cm evaporator with the same fan at standard ASHRAE conditions

Lord FiVe

Lord FiVe

LORD FIVE / PATTERN 55 / 19.05 X 12.7


TUBE Ø 5MM

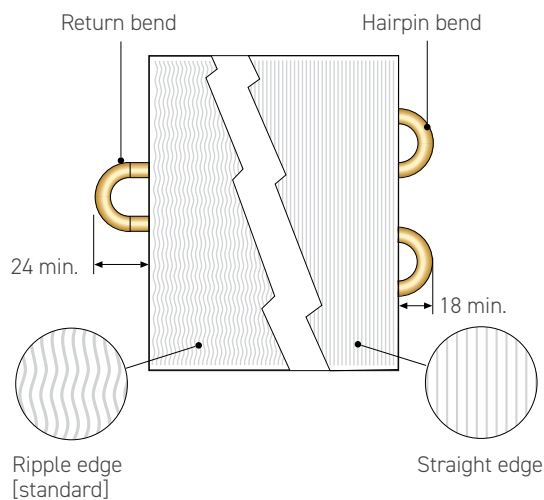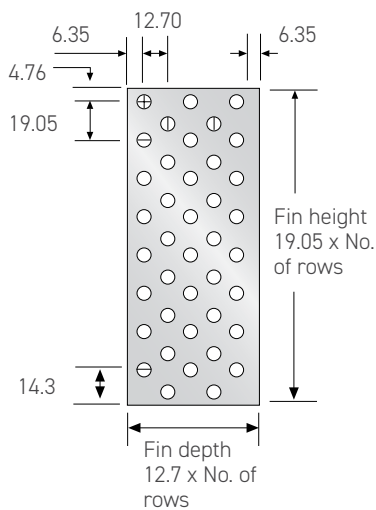

Coil Patterns

Fin Density Details


Fin Per Inch (FPI)	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
Distance (mm)	3.6	3.2	2.8	2.5	2.3	2.1	2.0	1.8	1.7	1.6	1.5	1.4	1.3	1.3	1.2
Aluminum Fin Thickness (mm)	0.20, 0.30	0.15, 0.20, 0.30	0.12, 0.15, 0.20, 0.30									0.12, 0.15			
Copper Fin Thickness (mm)		0.15, 0.20	0.13, 0.15, 0.20									0.13, 0.15			
Fin Shapes	Flat			Sine wave, Corrugated, Flat									Flat		



Optional Specifications



Slanted Coils



Bent and Circular Coils



LORDAN COIL DESCRIPTION KEY

55 / 3 X 9 X 800 / 11 - 5 [0]

pattern#

rows deep

rows high

fins length mm

fpi

circuits

empty holes

TRIPLE 7

TRIPLE 7 / PATTERN 15 / 19.05 X 16.5

TUBE Ø 7MM



REDUCED REFRIGERANTS



VOLUME SAVING





ENERGY SAVER



ROHS




REDUCED CO₂ FOOTPRINT

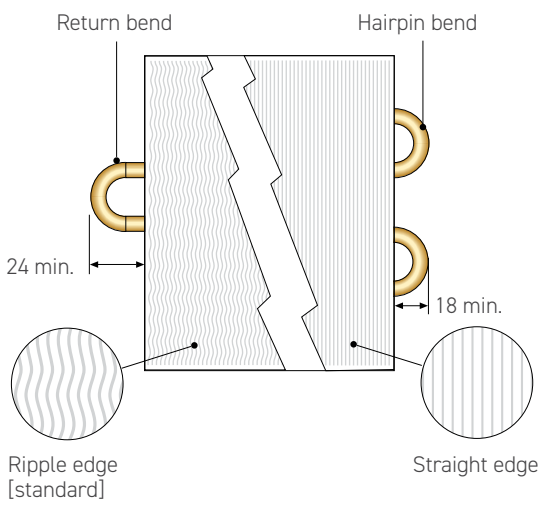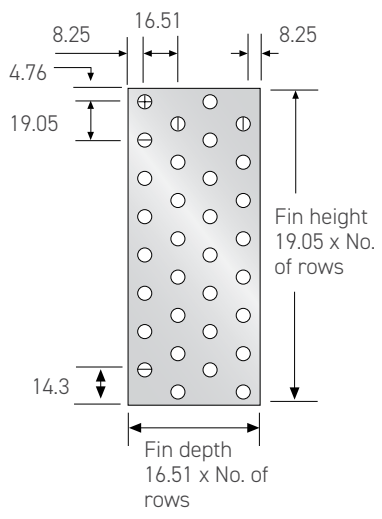

Fin Density Details

Fins Per Inch (FPI)	6	7	8	9	10	11	12	13	14	15	16	17	18	20	22
Distance (mm)	4.2	3.6	3.2	2.8	2.5	2.3	2.1	2.0	1.8	1.7	1.6	1.5	1.4	1.3	1.2
Aluminum Fin Thickness (mm)	0.2, 0.3	0.15, 0.2, 0.3			0.12 ,0.15, 0.2, 0.3							0.12 ,0.15			
Copper Fin Thickness (mm)	0.2		0.15, 0.2		0.13, 0.15, 0.2										
Fin Shapes	Louvered, Corrugated, High Corrugated, Sine Wave, Flat														



fin depth

fin height

fin length

Fin depth of coil = 16.51 x no. of rows deep

Fin height = 19.05 x no. of rows high

Optional Specifications



Slanted Coils



Bent and Circular Coils

LORDAN COIL DESCRIPTION KEY

15 / 3 X 9 X 800 / 11 - 5 [0]

pattern# rows deep rows high fins length mm fpi circuits empty holes

Triple 7

Coil Patterns



PATTERN 8

Pattern 8

PATTERN 8 / 25.4 X 15.875

TUBE Ø 9.52MM (3/8")


SPECIAL DENSE PATTERN FOR AUTOMOTIVE

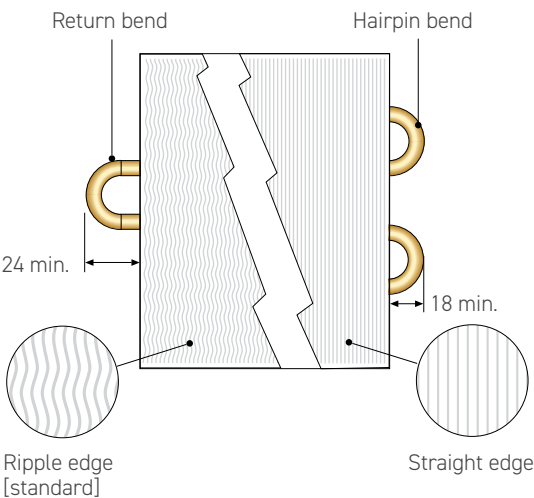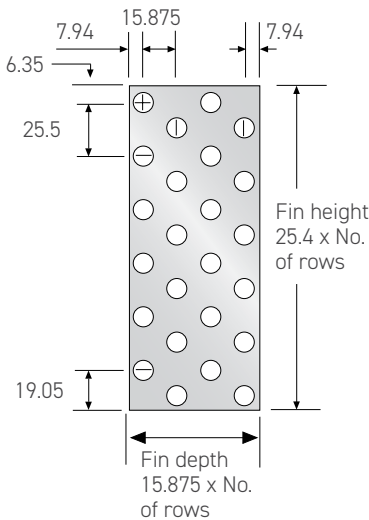

Coil Patterns

Fin Density Details

Fins Per Inch (FPI)	7	8	9	10	11	12	13	14	15	16	17
Distance (mm)	3.6	3.2	2.8	2.5	2.3	2.1	2.0	1.8	1.7	1.6	1.5
Aluminum Fin Thickness (mm)	0.15, 0.2		0.12, 0.15, 0.2								
Copper Fin Thickness (mm)		0.15		0.13, 0.15							
Fin Shapes	Corrugated										



Optional Specifications



Bent and Circular Coils



LORDAN COIL DESCRIPTION KEY	8	/	3	X	9	X	800	/	11	-	5	[0]
	pattern#		rows deep		rows high		fins length mm		fpi		circuits	empty holes

PATTERN 9

PATTERN 9 / 25.4 X 22

TUBE Ø 9.52MM (3/8")

WORLD STANDARD

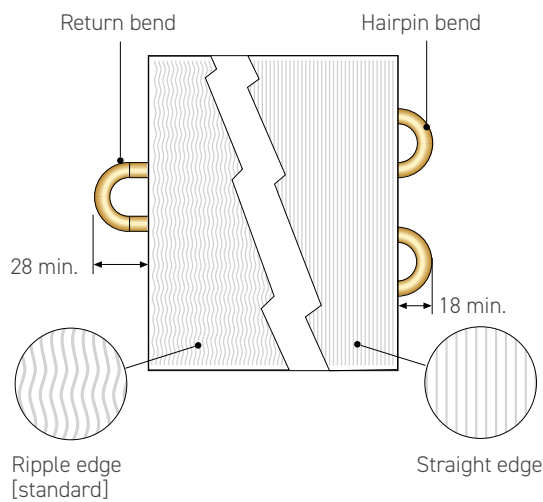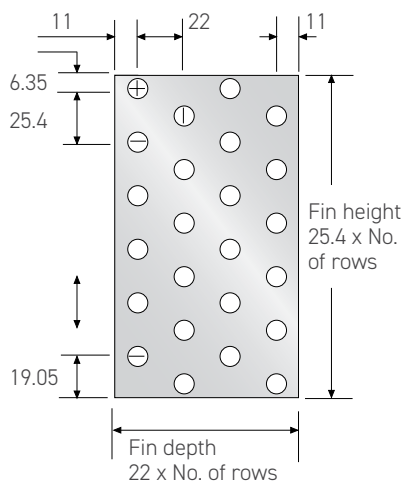

Fin Density Details

Fins Per Inch (FPI)	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Distance (mm)	6.3	5.1	4.2	3.6	3.2	2.8	2.5	2.3	2.1	2.0	1.8	1.7	1.6	1.5	1.4
Aluminum Fin Thickness (mm)	0.2, 0.3		0.15, 0.2, 0.3			0.12, 0.15, 0.2, 0.3									
Copper Fin Thickness (mm)				0.2	0.15, 0.2		0.13, 0.15, 0.2								
Fin Shapes	Louvered, Corrugated, Sine Wave, Flat														

fin depth

fin height

fin length


Fin depth of coil = 22 x no. of rows deep

Fin height = 25.4 x no. of rows high

Optional Specifications



Slanted Coils



Bent and Circular Coils



LORDAN COIL
DESCRIPTION KEY

9 / 3 X 9 X 800 / 11 - 5 [0]

pattern# rows deep rows high fins length mm fpi circuits empty holes

Pattern 9

Coil Patterns



PATTERN 11

Pattern 11

PATTERN 11 / 20.32 X 17.6

TUBE Ø 9.52MM (3/8")


SPECIALLY DESIGNED FOR STAINLESS STEEL TUBES

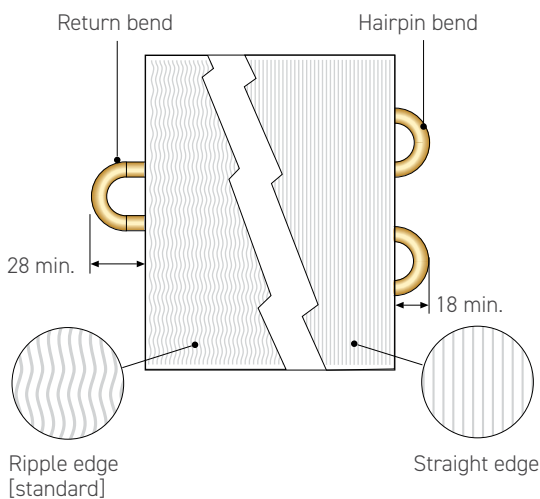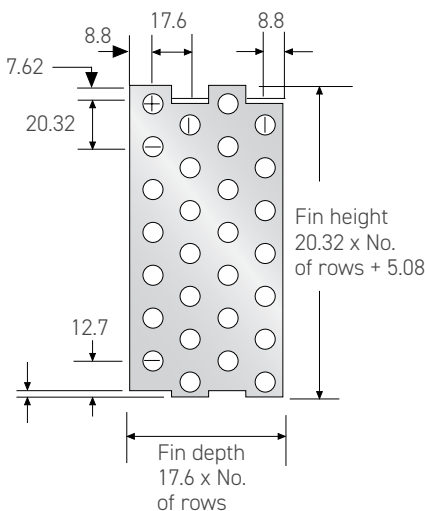

Coil Patterns

Fin Density Details

Fins Per Inch (FPI)	8	9	10	11	12	13	14	15	16
Distance (mm)	3.2	2.8	2.5	2.3	2.1	2.0	1.8	1.7	1.6
Aluminum Fin Thickness (mm)	0.15		0.12, 0.15						
Copper Fin Thickness (mm)			0.13, 0.15						
Fin Shapes	Louvered, Corrugated, Flat								



LORDAN COIL DESCRIPTION KEY

11 / 3 X 9 X 800 / 11 - 5 [0]

pattern#

rows deep

rows high

fins length mm

fpi

circuits

empty holes


PATTERN 13

PATTERN 13 / 25 X 12.5

TUBE Ø 9.52MM (3/8")


Pattern 13

EXTRA DENSE FOR HIGH OUTPUT IN MINIMUM DEPTH

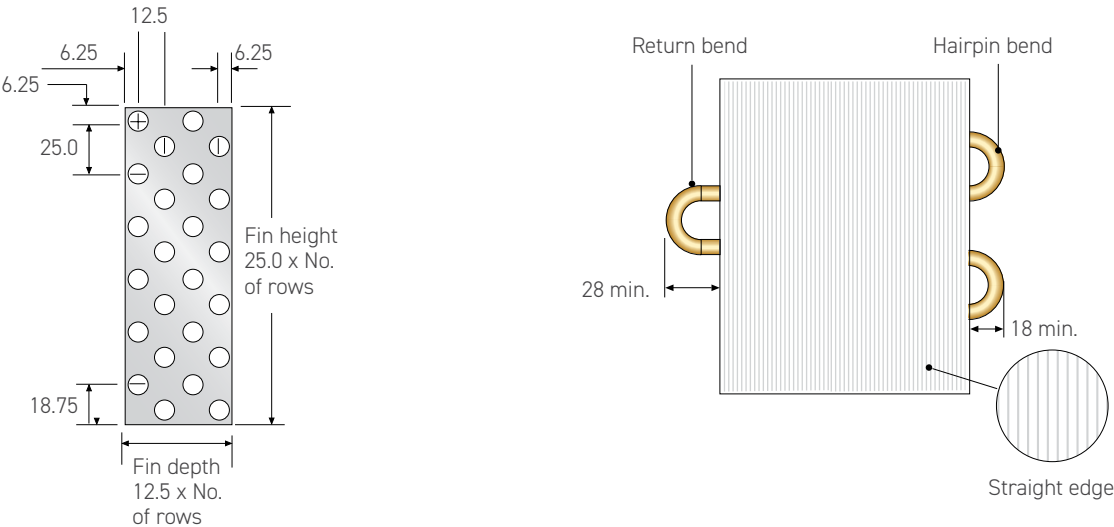

Fin Density Details


Fins Per Inch (FPI)	7	8	9	10	11	12	13	14	15
Distance (mm)	3.6	3.2	2.8	2.5	2.3	2.1	2.0	1.8	1.7
Aluminum Fin Thickness (mm)	0.2	0.15, 0.2		0.12, 0.15, 0.2					
Copper Fin Thickness (mm)			0.13, 0.15						
Fin Shapes	Flat								



Optional Specifications



Slanted Coils



Bent and Circular Coils

Coil Patterns

LORDAN COIL
DESCRIPTION KEY

13 / 3 X 9 X 800 / 11 - 5 [0]
pattern# rows deep rows high fins length mm fpi circuits empty holes



PATTERN 14

Pattern 14

PATTERN 14 / 25 X 25

TUBE Ø 9.52MM (3/8")


FOR VERY LOW AIR PRESSURE DROP

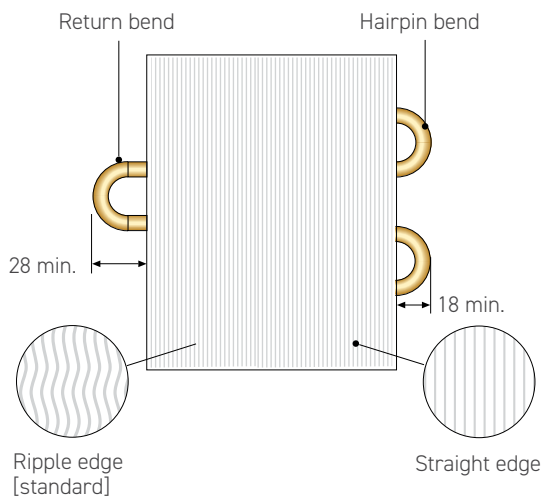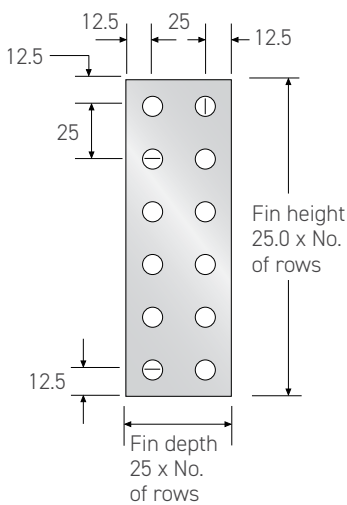

Coil Patterns

Fin Density Details

Fins Per Inch (FPI)	4	5	6	7	8	9	10	11	12	13	14	15	16
Distance (mm)	6.4	5.1	4.2	3.6	3.2	2.8	2.5	2.3	2.1	2.0	1.8	1.7	1.6
Aluminum Fin Thickness (mm)	0.2, 0.3		0.15, 0.2, 0.3							0.12, 0.15		0.12	
Copper Fin Thickness (mm)			0.13, 0.15, 0.2										
Fin Shapes	Flat, Sine wave												



Optional Specifications



Slanted Coils



Bent and Circular Coils

LORDAN COIL DESCRIPTION KEY

14 / 3 X 9 X 800 / 11 - 5 [0]



pattern# rows deep rows high fins length mm fpi circuits empty holes

PATTERN 7

PATTERN 7 / 31.75 X 27.48

TUBE Ø 12.7MM (1/2")

FOR HIGH WATER FLOW COILS

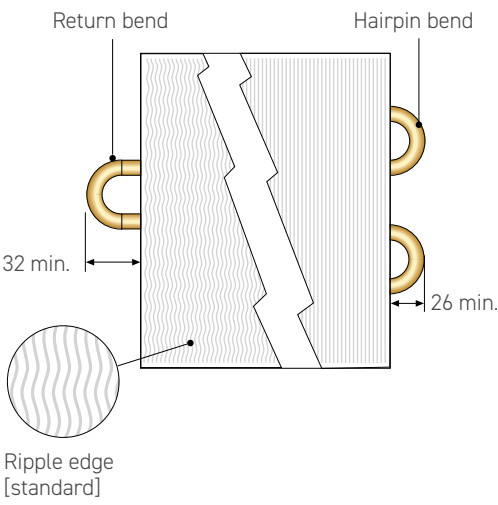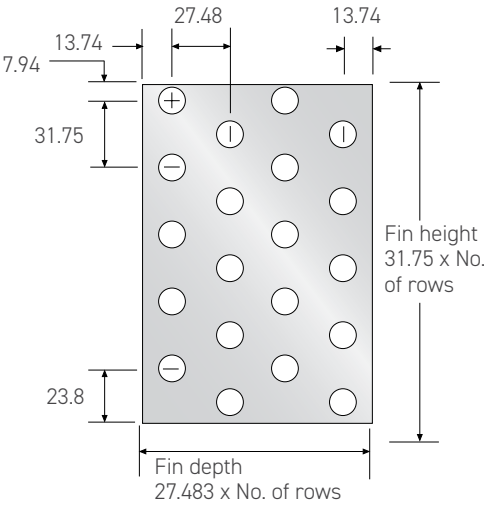

Fin Density Details

Fins Per Inch (FPI)	5	6	7	8	9	10	11	12	13	14
Distance (mm)	5.1	4.2	3.6	3.2	2.8	2.5	2.3	2.1	2.0	1.8
Aluminum Fin Thickness (mm)	0.2	0.15, 0.2			0.12, 0.15, 0.2					
Copper Fin Thickness (mm)	0.2	0.13, 0.15, 0.2								
Fin Shapes	Corrugated									

fin depth
fin height
fin length

Fin depth of coil = 27.483 x no. of rows deep

Fin height = 31.75 x no. of rows high

Optional Specifications



Bent and Circular Coils

LORDAN COIL DESCRIPTION KEY

7 / 3 X 9 X 800 / 11 - 5 [0]
pattern# rows deep rows high fins length mm fpi circuits empty holes

Pattern 7

Coil Patterns



PATTERN 5

Pattern 5

PATTERN 5 / 38.1 X 38.1

TUBE Ø 15.88MM (5/8")

FOR LARGE OUTPUTS UP TO 5 METERS LONG

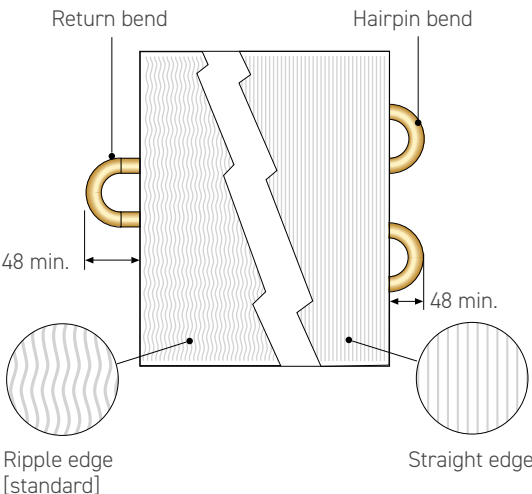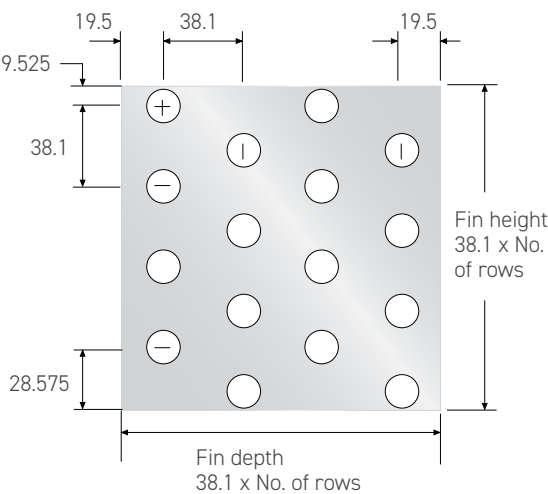

Coil Patterns

Fin Density Details

Fins Per Inch (FPI)	5	6	7	8	9	10	11	12
Distance (mm)	5.1	4.2	3.6	3.2	2.8	2.5	2.3	2.1
Aluminum Fin Thickness (mm)	0.2	0.15, 0.2			0.12, 0.15, 0.2			
Copper Fin Thickness (mm)	0.2			0.13, 0.15, 0.2				
Fin Shapes	Corrugated							

Fin depth of coil = 38.1 x no. of rows deep
 Fin height = 38.1 x no. of rows high

Optional Specifications



Bent and Circular Coils

LORDAN COIL DESCRIPTION KEY

5 / 3 X 9 X 800 / 11 - 5 [0]

pattern# rows deep rows high fins length mm fpi circuits empty holes



PATTERN 6

PATTERN 6 / 50.8 X 50.8

TUBE Ø 15.88MM (5/8")


Pattern 6

ULTRA LOW FIN DENSITY FOR FREEZERS

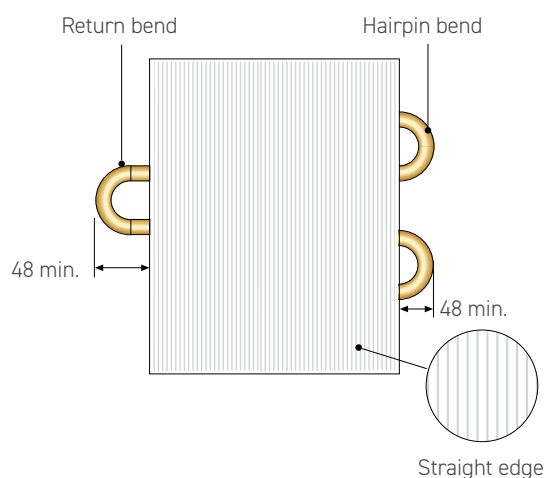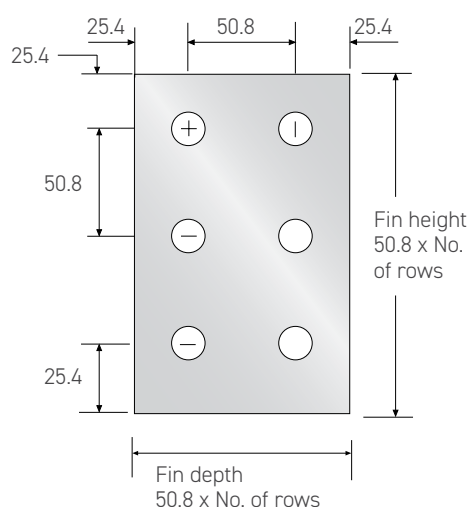

Fin Density Details

Fins Per Inch (FPI)	4	5	6	7	8
Distance (mm)	6.4	5.1	4.2	3.6	3.2
Aluminum Fin Thickness (mm)	0.2, 0.3			0.15, 0.2, 0.3	
Copper Fin Thickness (mm)				0.2	
Fin Shapes	Flat				



Optional Specifications



Bent and Circular Coils

Coil Patterns



LORDAN COIL
DESCRIPTION KEY

6 / 3 X 9 X 800 / 11 - 5 [0]

pattern# rows deep rows high fins length mm fpi circuits empty holes



TUBES & APPLICATIONS

Applications

Tube Shape		Applicable Diameters mm (inch)		Applicable Lordan Patterns	Common Uses
Smooth		15.88mm 12.70mm 9.52mm 7mm 5mm	(5/8") (1/2") (3/8")	5,6,7,8,9,11,13,14 Triple 7 (15) Five (55)	Standard in all coils
Rifled		12.70mm 9.52mm 7mm 5mm	(1/2") (3/8")	7,8,9,11,13,14 Triple 7 (15) Five (55)	Condensers and evaporators for increased capacities
Turbo Spirals in Tube		15.88mm 12.70mm 9.52mm 7mm	(5/8") (1/2") (3/8")	5,6,7,8,9,11,13,14 Triple 7 (15)	Improved capacities for liquid carrying coils with limited size restrictions


Tubes

Tube Materials Options

Standard Tube Material	Specification and Standard	Tube diameter mm (inch)		Available Wall Thickness mm (inch)	
Copper		ASTM B-280	15.88mm (5/8")	0.40mm 0.46mm	.016", .018"
			12.70mm (1/2")	0.35mm 0.40mm	.014", .016"
			9.52mm (3/8")	0.28mm 0.35mm	.011", .014"
			7mm	0.25mm, 0.28mm 0.50mm, 0.71mm	.010", .011" .020", .028"
			5mm	0.25mm, 0.35mm 0.40mm	.010", .014" .016"
Stainless Steel		316L	12.70mm (1/2")	0.89mm	.035"
			9.52mm (3/8")	0.71mm	.028"
			7mm	0.51mm	.020"

TUBES BENDING CAPABILITY

Capabilities

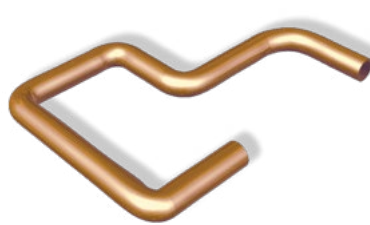

Available Tube O.D.





inch		3/16"	1/4"		5/16"	3/8"			1/2"		5/8"		3/4"
mm	4			7			10	12		15		18	

End Forming Of Copper Tubes – Standard Options

		O.D. range
O-Ring Long Pilot		9.53 to 19.05 (3/8" to 3/4")
O-Ring Short Pilot		9.53 to 19.05 (3/8" to 3/4")
Flare		6.35 to 19.05 (1/4" to 3/4")
Water O-Ring		9.53 to 22.22 (3/8" to 7/8")
Water Cone Head		9.53 to 19.05 (3/8" to 3/4")
Reduced Diameter		Any
Expanded Diameter		Any




Tubes

FINS: SHAPES & APPLICATIONS




Fin Shapes		Characteristics	Common Applications
Louvered		Louvered fins increase the heat-transfer capacity by creating air turbulence which reduces the boundary layer on the fin's surface, but at a cost of increased air-pressure drop across the coil.	<ul style="list-style-type: none"> • Evaporators • Heaters and Coolers • Condensers operating in areas with light to normal dust conditions • This fin shape is for all applications with normal dust conditions
Corrugated (low and high)		Corrugated fins improve the heat transfer factor to a lower degree than louvered fins. They also have a lower resistance to air flow.	<ul style="list-style-type: none"> • Used where icing or heavy-dust conditions are expected, like condensers for off road vehicles and for heavy dust applications
Sine Wave		Sine wave fins improve the heat transfer factor to a higher degree than corrugated fins. These have about the same resistance to air flow as the corrugated fins.	<ul style="list-style-type: none"> • Good all purpose selection for all types of coils, provides the best output to air pressure drop ratio • Default fin shape when not otherwise specified
Flat		Flat fins reduce ice accumulation on fins. They have the lowest resistance to air flow.	<ul style="list-style-type: none"> • Deep freezers • Cooling / freezing systems • Passive air flow systems

FINS: MATERIAL OPTIONS

Natural Materials

Fin Type		Characteristics	Common Applications
Regular Aluminum		Regular Aluminum of the 8xxx alloy series is the most common and cost effective fin material. It exhibits good endurance under normal environmental conditions.	<ul style="list-style-type: none"> Residential applications (both indoors and outdoors) Vehicles of all kind Large coils for central systems Freeze & deep-freeze
Marine Quality Aluminum		Marine Quality Aluminum has improved resistance to salty, humid conditions. It is cost effective and has demonstrated first-rate Salt Spray test results.	<ul style="list-style-type: none"> Coils for marine equipment Coils for coastal residences Coils for mining equipment Coils for corrosive industries Applications exposed to salty, humid and/or corrosive conditions
Copper		Copper has higher heat conductivity and mass, and is more costly than Aluminum.	<ul style="list-style-type: none"> Coolers for special industrial machines Areas with space limitations High-tech environments

Precoated Materials

Fin Type		Characteristics	Common Uses
Hydrophobic		The epoxy based hydrophobic coating effectively repels water and inhibits dust and bacterial accumulation. Salt Spray test results are excellent (over 1,000 hours).	<ul style="list-style-type: none"> Condensers for coastal residencies Condenser coils for polluted areas Coils for corrosive industries Coils for laboratories and hospitals
Hydrophilic		The special two-micron pre-coated polymer hydrophilic coating improves airflow by reducing thickness of condensing water layers, known as water carry-over phenomenon.	<ul style="list-style-type: none"> Evaporators and coolers Avoids carry-over of condensed water at high air velocities
Nano Coating		The nano coating is only 5μ thin with high heat transfer capabilities. Resists corrosion, salt water, and dust; Salt Spray test results are superior (over 5,000 hours).	<ul style="list-style-type: none"> Protection against organic solvents and chemicals Self-cleaning Reduced dirt accumulation Lower energy consumption Lower maintenance costs

FINS: SPECIAL COATINGS

Special Coatings

Today, a long-lasting coil is as important as the air quality it handles. Lordan offers specialized coatings for extended product life and protection against bacteria buildup and corrosion, especially important for central cooling systems, offices, shopping centers, as well as central systems for residential buildings.

SOLUTIONS FOR EXTREME ENVIRONMENTS



Complex heating, cooling and refrigeration challenges demand high enduring coils suitable to withstand exposure to extreme environments. Harsh conditions found in coastal or industrial environments release airborne contaminants that are corrosive to the materials of the coil.

Lordan's specialized coatings are designed to reduce deterioration by sealing out moisture and airborne contaminants such as salt and salt-spray, humidity, corrosive fumes emitted from highly polluted industrial areas and chemical production, and other damaging elements.

Fins

NANO-COATING



BUILT
TO LAST



ROHS





ENERGY
SAVER



LOW
MAINTENANCE

Lordan offers an innovative super water repellent coating with an enhanced hydrophobic layer that is only 5μ thin. Our nano-coating guarantees extended product life while maintaining excellent heat transfer capabilities.

The coating has proven self-cleaning and its low dirt accumulation attributes significantly reduce energy consumption and maintenance costs, while protecting against many organic solvents and chemicals.

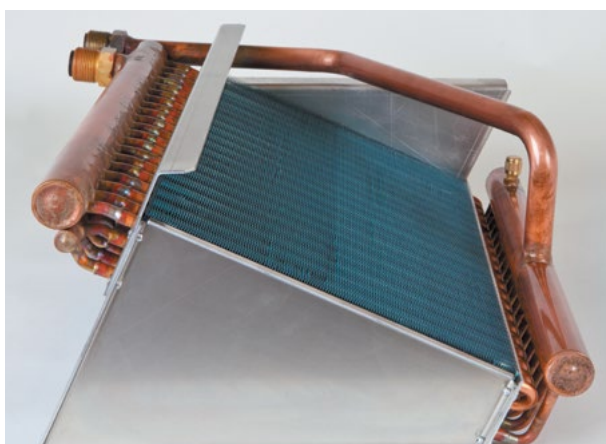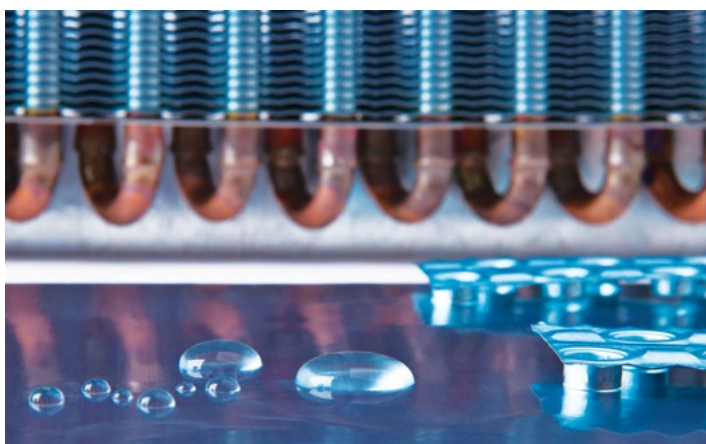

EPOXY COATING LORD-PHOB EPOXY COATING




BUILT
TO LAST



ROHS



LOW
MAINTENANCE

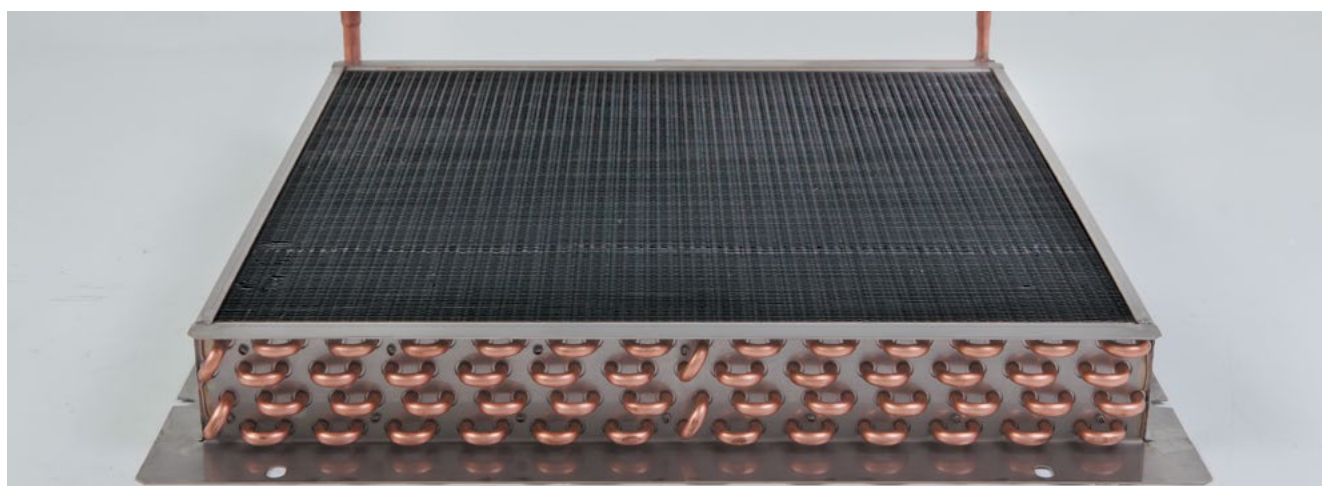

Lord-Phob is an epoxy based coated fin providing first-grade resistance to corrosive conditions. The ultra thin epoxy-based coating preserves the appropriate gap needed for effective heat transfer between the fin and the surrounding air.

LORD-PHILL HYDROPHILIC COATING




ENERGY
SAVER




ROHS

Our hydrophilic coating is a 2-micron special pre-coated polymer. The hydrophilic surface-tensile qualities flatten condensing water droplets on the fin, thereby reducing water layer buildup that can restrict air flow between the fin layers.

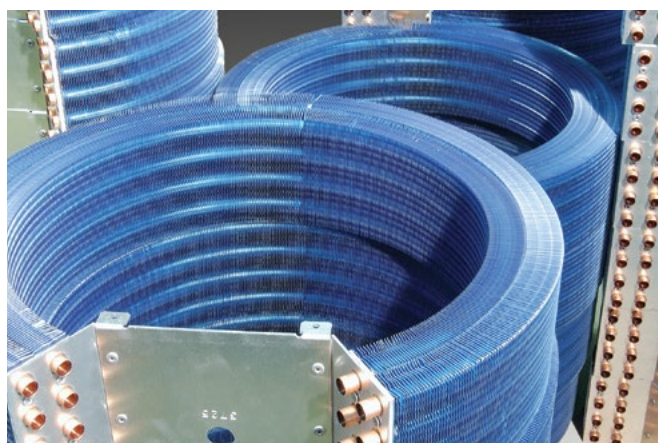

The coating also prevents the phenomenon of water carry-over from drops getting into the evaporator's airflow at high air speeds.

This is especially significant for evaporators with tangential blowers.


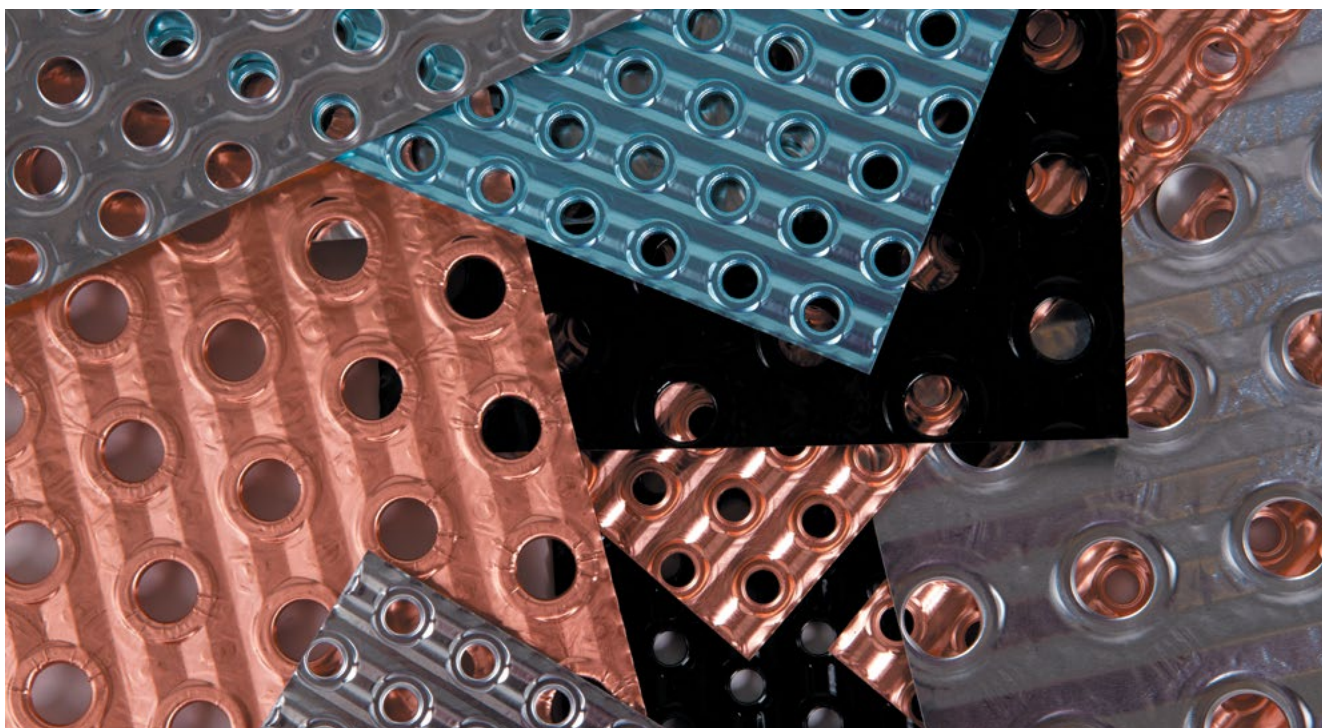


Fins

Technical Specifications	Nano	Lord Phob	Lord Phil
Material type	polymer	epoxy based + chemical conversion	polymer + chemical conversion
Layer thickness	~ 5 micron	~ 3 micron	~ 2 micron
Thermal conductivity effects	< 1%	< 1%	< 1%
Standard color	light blue	black	light blue
Temperature resistance	-20°C to 250°C	-20°C to 200°C	-20°C to 120°C
Salt spray humidity endurance test	5,000 hours	1,000 hours	500 hours


Nano

Nano coating prevents the adhering of the water droplets on the fin surface, keeping the fin dry and not prone to dust accumulation.

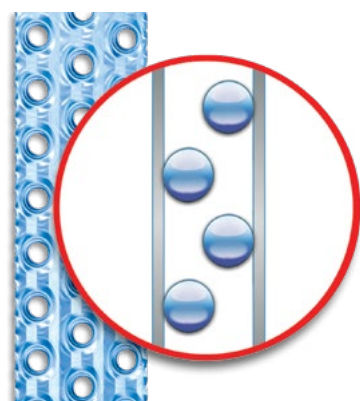



Lord Phill

Lord Phill coating reduces surface tension by flattening water droplets and allowing increased air flow.

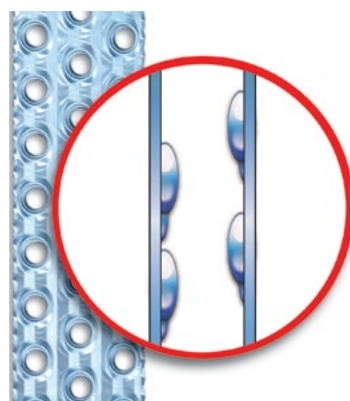

Uncoated

On uncoated fins, large round water droplets accumulate that can restrict air flow and produce water spray.

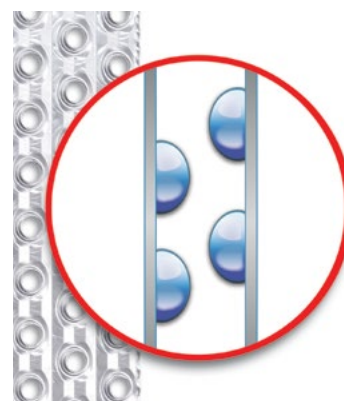

PREMIUM COILS

ALL-AL ALUMINUM COILS



VOLUME
SAVING



REDUCED
WEIGHT



ROHS



RECYCLED
MATERIALS





REDUCED CO₂
FOOTPRINT

Rising concern over energy savings and the environment has prompted us to take waste reduction measures without compromising performance. Lordan is pleased to offer recyclable round aluminium tubing that is one hundred percent recyclable, designed for both water and gas applications.

Our recyclable All-Al (all aluminum) coils significantly reduces coil weight and provides better corrosion resistance that translates to energy efficiency in terms of lower operating costs and volume savings.

Benefits of Aluminum

- Cost-effectiveness: Best cost/quality ratio
- 100 percent recyclable
- High strength
- Lightweight and easy to handle
- Non-corrosive
- Good heat and cold conductor
- Suited for heavy duty applications

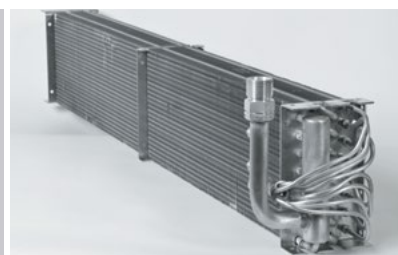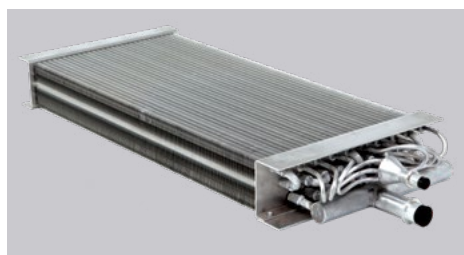

All-Al Aluminum Coils
& Stainless Steel Coils

Premium Coils


STAINLESS STEEL COILS



BUILT
TO LAST



ROHS

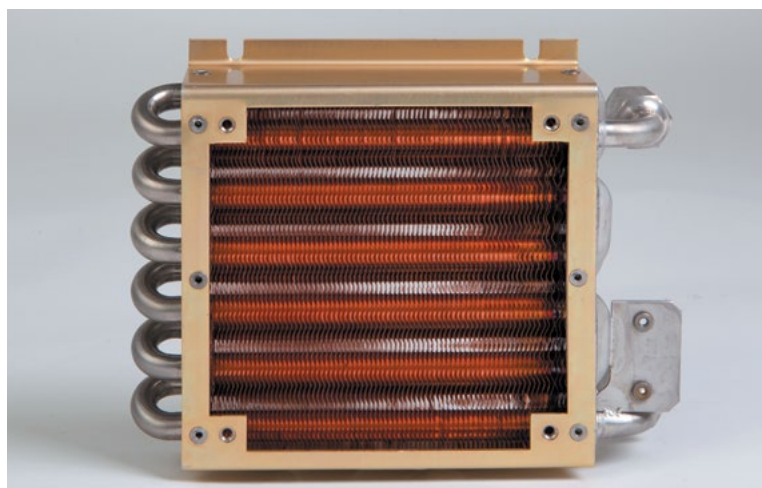

We offer stainless steel tubing especially suited for highly corrosive fluids and applications.

Benefits of Stainless Steel

- Cost-effective
- High strength, solid material
- Better wear resistance
- Non-corrosive
- Non-abrasive
- Inert metal
- Superior heat and cold conductor
- Suited for heavy duty applications


QUOTATION REQUEST

Quotation Request


Name _____
 Company _____
 E-mail _____
 Phone _____

Tube Material	Aluminum / Copper / St.St.
Frame Material	C-Alv/Al/mine/CU/Brass/ St.St.
Fin Material + Coating	Aluminum / Copper
Fin Thickness	0.12 / 0.15 / 0.20 / 0.30 mm
Painted	Yes / No

Airflow Direction



1								
2	○	○	○	○	○	○	○	○
3	○	○	○	○	○	○	○	○
4	○	○	○	○	○	○	○	○
5	○	○	○	○	○	○	○	○
6	○	○	○	○	○	○	○	○
7	○	○	○	○	○	○	○	○
8	○	○	○	○	○	○	○	○
9	○	○	○	○	○	○	○	○
10	○	○	○	○	○	○	○	○
11	○	○	○	○	○	○	○	○
12	○	○	○	○	○	○	○	○
13	○	○	○	○	○	○	○	○
14	○	○	○	○	○	○	○	○
15	○	○	○	○	○	○	○	○
16	○	○	○	○	○	○	○	○
17	○	○	○	○	○	○	○	○
18	○	○	○	○	○	○	○	○
19	○	○	○	○	○	○	○	○
20	○	○	○	○	○	○	○	○
21	○	○	○	○	○	○	○	○
22	○	○	○	○	○	○	○	○
23	○	○	○	○	○	○	○	○

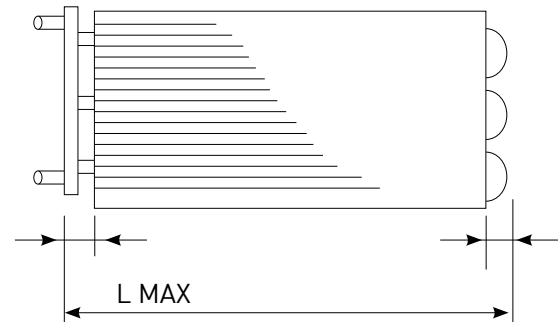

Operating Conditions Evaporator / Condenser

Airflow	m3/h	CFM
Air Inlet Temp. DB	°C	°F
Air Inlet Temp. WB	°C	°F
Or Air Inlet Relative Humidity	RH%	
Refrigerant Type		
Evaporating / Condenser Temp.	°C	°F
Superheat Sub-Cool	°K	°R
Capacity Required	kW	BTU/h

Fluid to Air Coil

Airflow	m3/h	CFM
Air Inlet Temp. DB	°C	°F
Air Inlet Temp. WB	°C	°F
Or Air Inlet Relative Humidity	RH%	
Fluid Flow Rate	L/min	GPM
Fluid Inlet Temp.	°C	°F
Fluid Type	Water %	
	Ethylene glycol %	
	Propylene glycol %	
For any other fluid, indicate the following properties at two relevant temperatures: viscosity, specific heat, thermal conductivity or density.		
Capacity Required	kW	BTu/h

UNIT CONVERSION

LENGTH

1 inch (1") = 25.4 mm
 1 foot (1') = 12 inches = 304.8 mm
 1 yard = 3 feet = 0.914m, 914.4 mm

AREA

1 square foot = 0.09290 square meter
 1 square meter = 10.76 square feet

VOLUME

1 cubic foot = .02832 cubic meter, 1 cubic meter = 35.31 cubic feet
 1 US gallon = 3.7854 liter

FLOW RATE

1 GPM, Gallon per Minute = .2273 CBM/H, cubic meter per hour = 1/4.4
 1 CFM, Cubic Feet per Minute = 1.7 CBM/H

VELOCITY

1 FPM, Foot per Minute = 1/197 meter per second

MASS

1 lb, pound = 16 oz, ounce = 0.4536 kg
 1 oz, ounce = 28.35 gram

TEMPERATURE

Deg. C = $\frac{\text{deg. F} - 32}{1.8}$; Deg. F = Deg. C x 1.8 + 32

THERMAL CAPACITY

1 Btu/h = .2926 Watt
 1 Kcal/h = 1.163 Watt
 1 TR, Ton Refrigeration = 3.515 kW

PRESSURE


1 PSI = 6.89 kPa
 1 Bar = 100 kPa
 1" WG = 25.4 mm WG = 248.8 Pa
 1' WG = 0.434 PSI = 304.8 mm WG = 2.989 kPa

LORDAN WORLDWIDE LOCATIONS

● MANUFACTURING FACILITY

● LOCAL REPRESENTATIVE

● WAREHOUSE

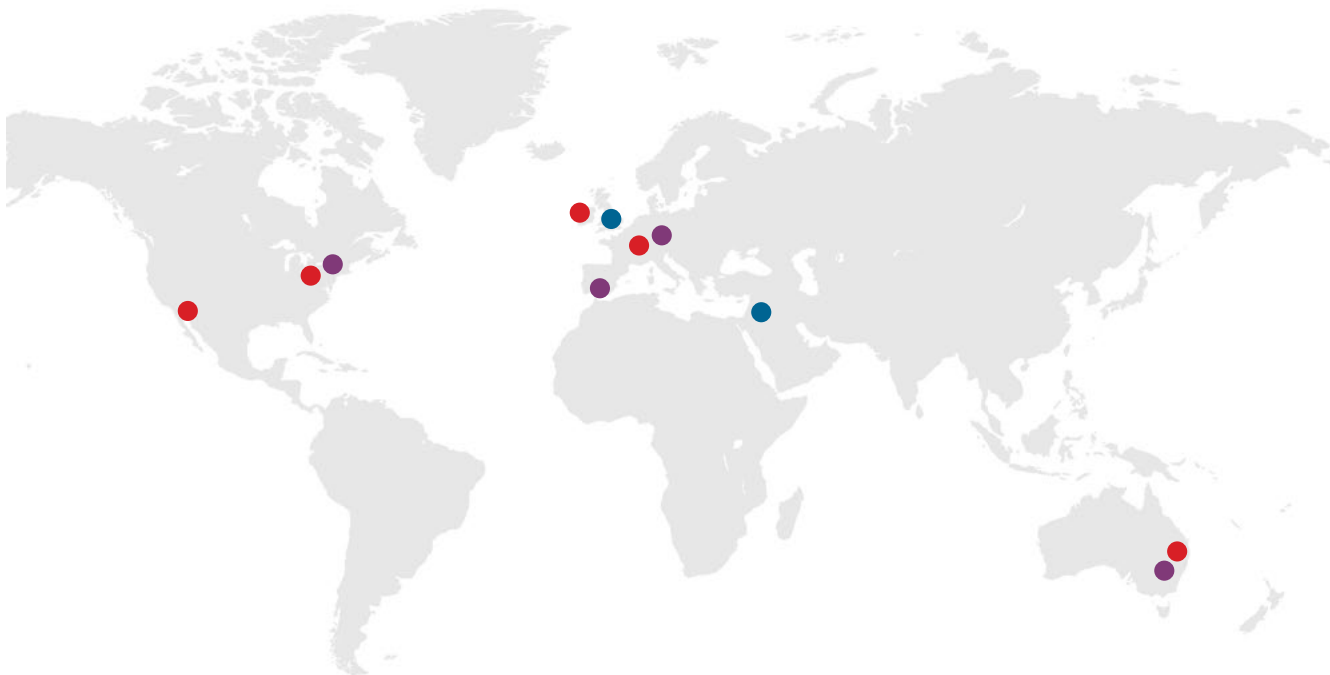

NAME YOUR REQUIREMENT – WE HAVE THE EXPERTISE TO MEET HEATING, COOLING AND REFRIGERATION CHALLENGES WITH TOP QUALITY, ENERGY EFFICIENT SOLUTIONS, BASED ON TECHNOLOGICALLY ADVANCED FIN AND TUBE COILS SUITED TO THE SPECIAL NEEDS OF OUR CUSTOMERS.

WWW.LORDAN-COILS.COM

THE LORDAN ADVANTAGE



REDUCED
REFRIGERANTS



VOLUME
SAVING



ENERGY
SAVING



RECYCLED
MATERIALS



ROHS



REDUCED CO₂
FOOTPRINT



LOW
MAINTENANCE



REDUCED
WEIGHT



BUILT TO
LAST



Israel - Headquarters

LORDAN (A.C.S.) Ltd.
service@lordan.co.il
Phone: +972 (0)4 690 7506
Fax: +972 (0)4 690 7138

United Kingdom

LORDAN (UK) Ltd.
stuart@lordan-uk.com
Phone: +44 (0)1443 812222
Fax: +44 (0)1443 812312

Europe

LORDAN (Europe) Ltd.
Shimshon Avrahami
Shimshona@lordan.co.il
Phone: +972-4-690-7140
Mobile: +972-50-3109227

North America & Spain

LORDAN (A.C.S.) Ltd.
Roni Wasserman
roniw@lordan.co.il
Phone: +353 91 897 769
Mobile: +353 87051 5946

Asia Pacific

LORDAN (A.C.S.) Ltd.
Shimshon Avrahami
Shimshona@lordan.co.il
Phone: +972-4-690-7140
Mobile: +972-50-3109227